



INSTRUMENT APPROACH CHART - ICAO

VAR 5° E

AD ELEV 980 FT
THR 26 ELEV 963 FT
HGT RELATED TO THR ELEV
CIRCLING HGT RELATED TO AD ELEV

RADAR 125.685
TOWER 129.625
ATIS 118.800
128.130

L I N Z (LOWL)
ÖSTERREICH AUSTRIA
ILS CAT II & III or LOC RWY 26

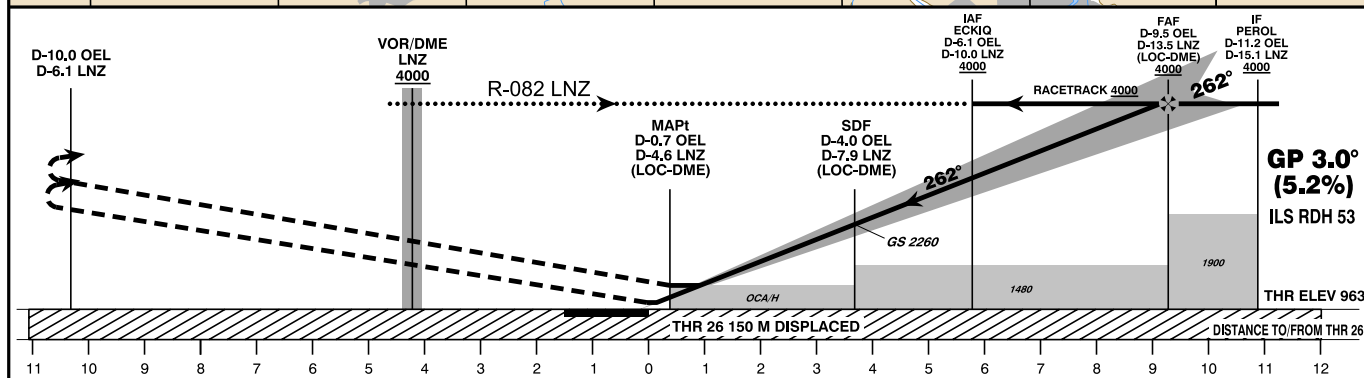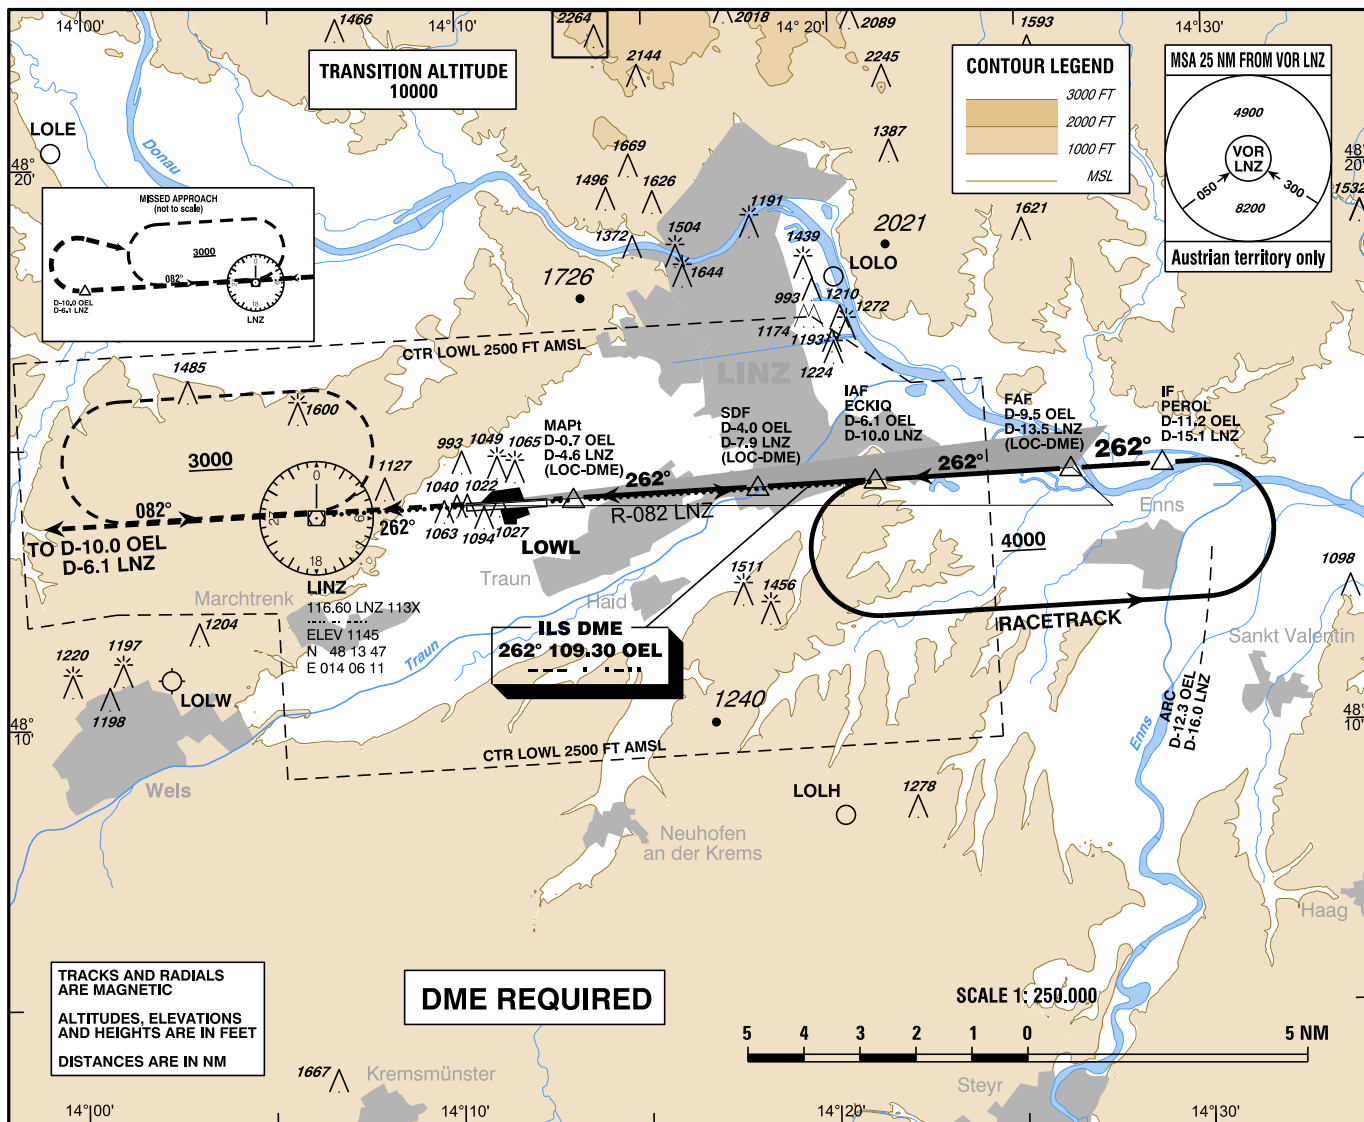

MISSED APPROACH: CLIMB STRAIGHT AHEAD, AT D-10.0 OEL (D-6.1 LNZ) TURN RIGHT TO VOR/DME LNZ; CLIMB TO 3000 FT AMSL AND HOLD.

OCA (OCH) IN FT		A	B	C	D / D _L	D-9.5 OEL to THR 26 - DISTANCE 9.4 NM (Timing not authorized for defining the MAPt)								
STRAIGHT-IN APPROACH	CAT I Press. Altim.	1115 (152)	1128 (165)	1136 (173)	1146 (183)	Rate of descent (5.2%)	GS (KT)	80	100	120	140	160	180	
	CAT II RDO Altim.	1027 (64)	1045 (82)	1056 (93)	1071 (108)		FT / MIN	420	530	640	740	850	960	
	CAT III	A P P R O V E D												
	LOC-DME	1300 (337)												
CIRCLING		1470 (490)	1550 (570)	1930 (950)										
CIRCLING NOT AUTHORIZED NORTH OF THE AD														
						DME OEL	9	8	7	6	5	4	3	2
						DIST THR	8.8	7.8	6.8	5.8	4.8	3.8	2.8	1.8
						ALT (HEIGHT)	3830 (2867)	3510 (2547)	3190 (2227)	2870 (1907)	2560 (1597)	2240 (1277)	1920 (953)	1600 (637)