


STANDARD DEPARTURE CHART -
INSTRUMENT (SID) - ICAO

VAR 5°E

LINZ RWY 08

L I N Z (LOWL)
ÖSTERREICH AUSTRIA

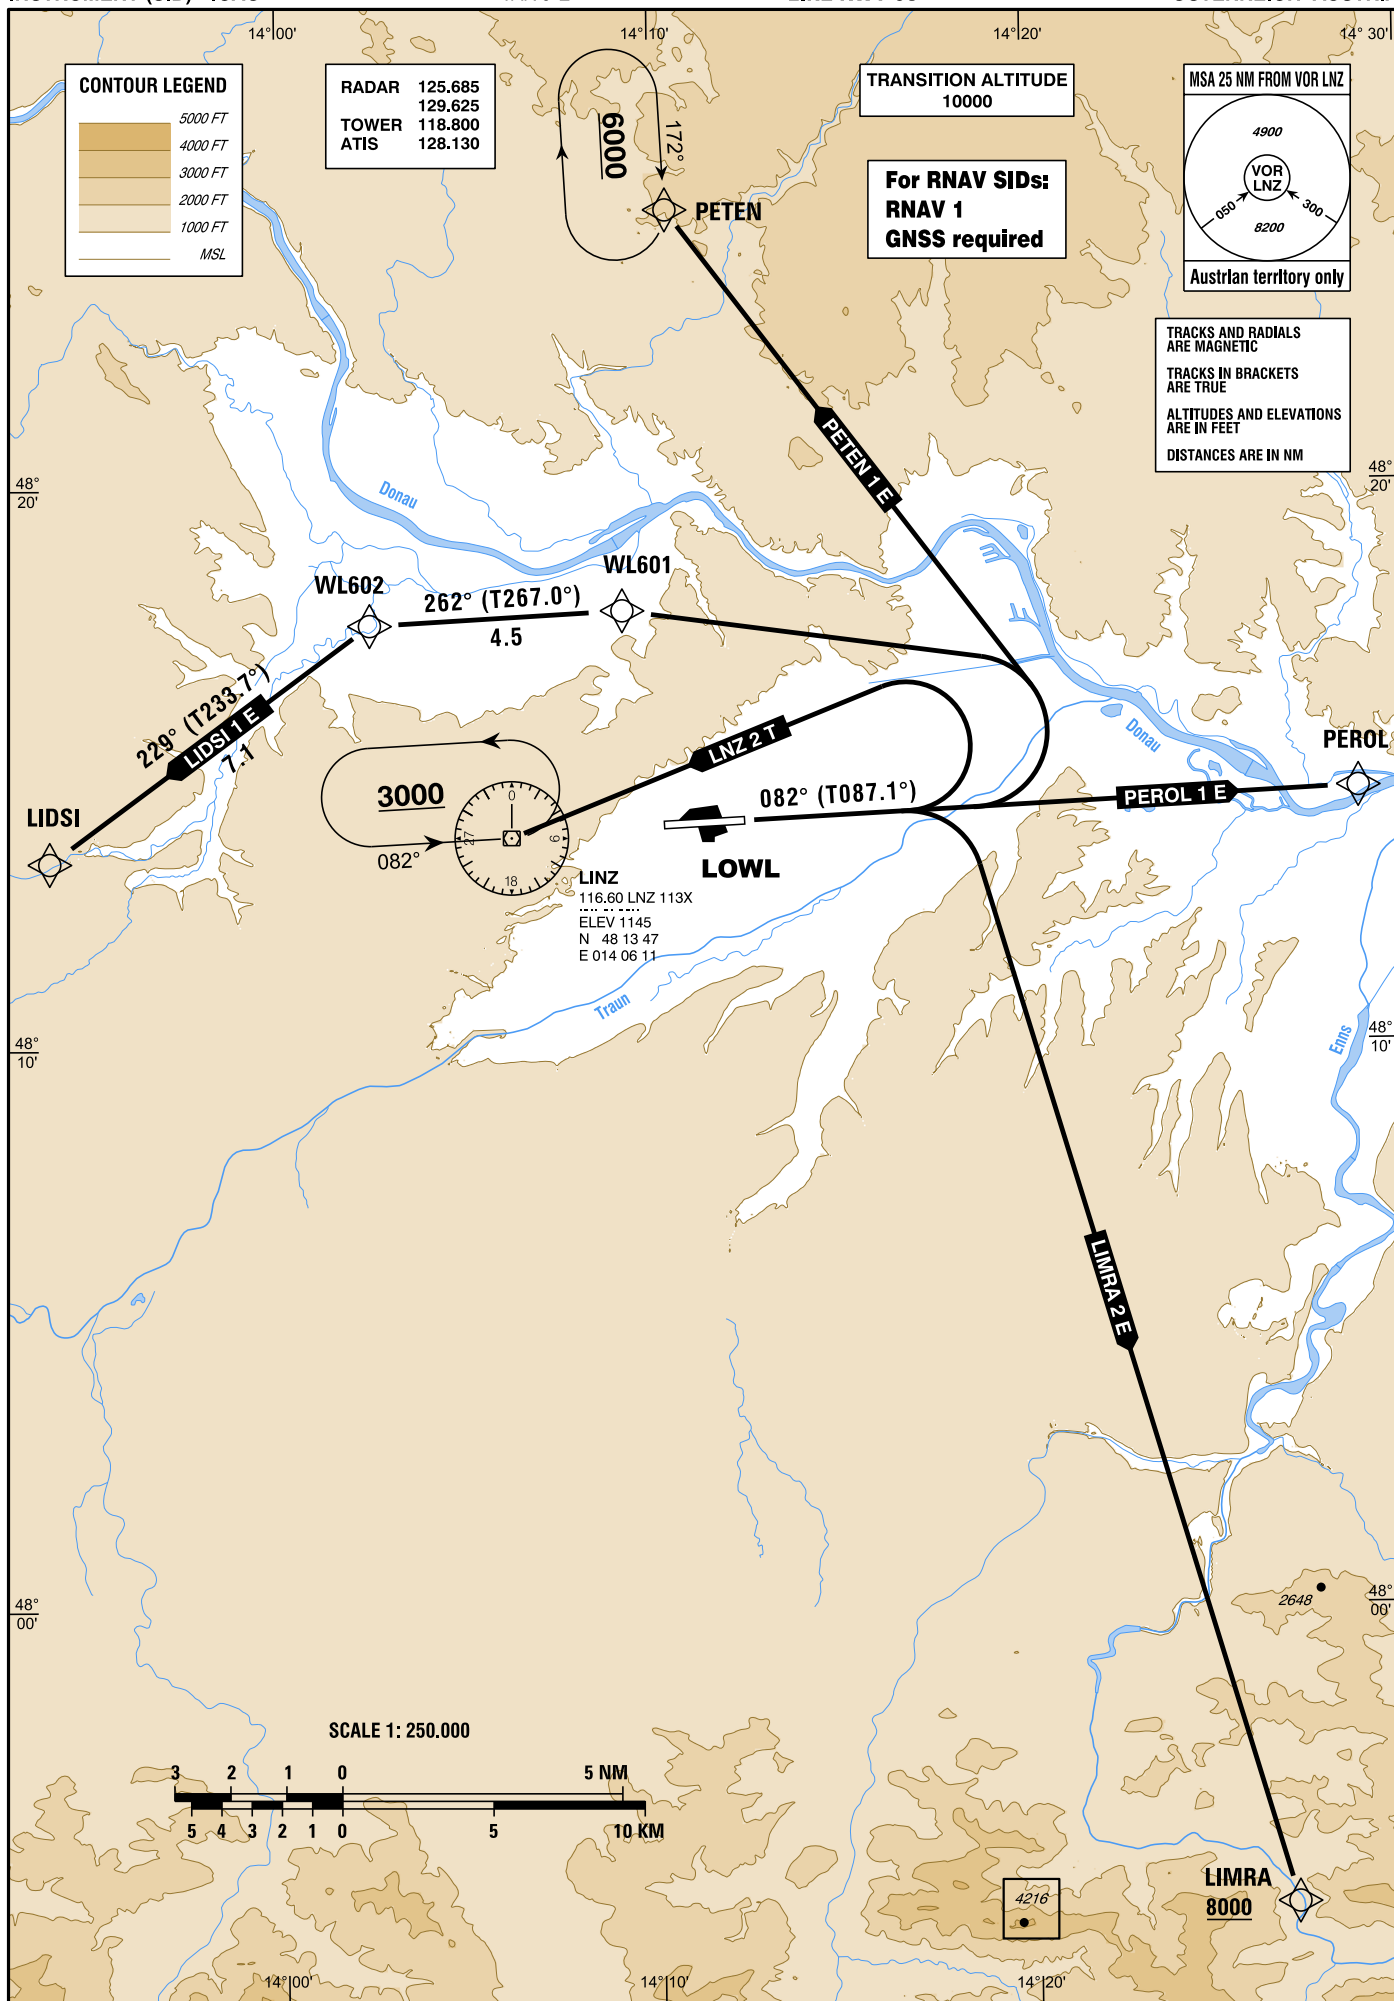



Designator	Route	After Take-Off		Remarks						
		Climb to ..initially	Expect FREQ							
LIDS1 1 E Lidsi one echo departure	Climb on track 082° to 3500 FT AMSL - WL601 - WL602 - LIDS1	6000 FT AMSL	LINZ RADAR 125.685 MHZ	Climb gradient at least 3.3% (205 FT/NM). On ATC discretion propeller driven aircraft can be instructed to turn direct WL601 when passing 2000 FT AMSL. During inital turn MAX IAS 120 KT.						
Contact LINZ RADAR when advised by Tower										
Coding Table of LIDS1 1 E										
Path Terminator	Waypoint			Course/ Track ° MAG (° True)	DIST NM	Turn Direction	Constraints		Navigation Specification	Remarks
	Identifier	Flyover	Coordinates				Level FT	Speed KT		
CA				082° (087.1°)			A3500	205-	RNAV 1	
DF	WL601	no	N481749.53 E0140911.68			left			RNAV 1	
TF	WL602	no	N481735.28 E0140226.13	262° (267.0°)	4.5				RNAV 1	
TF	LIDS1	no	N481322.19 E0135350.30	229° (233.7°)	7.1	left			RNAV 1	

Designator	Route	After Take-Off		Remarks						
		Climb to ..initially	Expect FREQ							
LIMRA 2 E Limra two echo departure	Climb on track 082° to 3000 FT AMSL - LIMRA	8000 FT AMSL	LINZ RADAR 125.685 MHZ	Climb gradient at least 4.6% (280 FT/NM).						
Contact LINZ RADAR when advised by Tower										
Coding Table of LIMRA 2 E										
Path Terminator	Waypoint			Course/ Track ° MAG (° True)	DIST NM	Turn Direction	Constraints		Navigation Specification	Remarks
	Identifier	Flyover	Coordinates				Level FT	Speed KT		
CA				082° (087.1°)			A3000	205-	RNAV 1	
DF	LIMRA	no	N475439.53 E0142652.02			right	A8000+		RNAV 1	

Designator	Route	After Take-Off		Remarks
		Climb to ..initially	Expect FREQ	
LNZ 2 T Linz two tango departure	Climb on track 082°, when passing 3000 FT AMSL, turn LEFT inbound to VOR/DME LINZ and enter holding 3000 FT AMSL or above.	4000 FT AMSL	LINZ RADAR 125.685 MHZ	Only available for NON-RNAV equipped aircraft. Climb gradient at least 4.6% (280 FT/NM). During initial turn MAX IAS 205 KT.
Contact LINZ RADAR when advised by Tower				

Designator	Route	After Take-Off		Remarks						
		Climb to ..initially	Expect FREQ							
PEROL 1 E Perol one echo departure	Climb on track 082° to PEROL	6000 FT AMSL	LINZ RADAR 125.685 MHZ	Climb gradient at least 6.1% (375 FT/NM).						
Contact LINZ RADAR when advised by Tower										
Coding Table of PEROL 1 E										
Path Terminator	Waypoint			Course/ Track ° MAG (° True)	DIST NM	Turn Direction	Constraints		Navigation Specification	Remarks
	Identifier	Flyover	Coordinates				Level FT	Speed KT		
CF	PEROL	no	N481434.69 E0142849.39	082° (087.1°)					RNAV 1	

Designator	Route	After Take-Off		Remarks						
		Climb to ..initially	Expect FREQ							
PETEN 1 E Peten one echo departure	Climb on track 082° to 3500 FT AMSL - PETEN	6000 FT AMSL	LINZ RADAR 125.685 MHZ	Climb gradient at least 4.6% (280 FT/NM).						
Contact LINZ RADAR when advised by Tower										
Coding Table of PETEN 1 E										
Path Terminator	Waypoint			Course/ Track ° MAG (° True)	DIST NM	Turn Direction	Constraints		Navigation Specification	Remarks
	Identifier	Flyover	Coordinates				Level FT	Speed KT		
CA				082° (087.1°)			A3500	205-	RNAV 1	
DF	PETEN	no	N482458.49 E0141026.08			left			RNAV 1	

PBN Holding								
Holding Point	Inbound Track ° True	Inbound Track ° MAG	Turn Direction	Speed KT	Minimum Holding Altitude FT AMSL / FL	Time	DIST NM	Remarks
LNZ	086.9°	082°	left		A3000	1 MIN		
PETEN	177.0°	172°	right		A6000	1 MIN		