

INSTRUMENT
APPROACH
CHART - ICAO


VAR 4° E

AD ELEV 1907 FT
THR 26 ELEV 1894 FT
HGT RELATED TO THR ELEV

RADAR 128.975
TOWER 120.100
ATIS 126.030

INNSBRUCK (LOWI)
ÖSTERREICH AUSTRIA
LOC/DME PROCEDURE EAST
(3.77° GP available)


CHANGE: MINIMUM WITH 3.0% MA CLIMB GRADIENT DELETED; MAG. COURSE; MOCA BOXES; DME DISTANCES; EDITORIAL

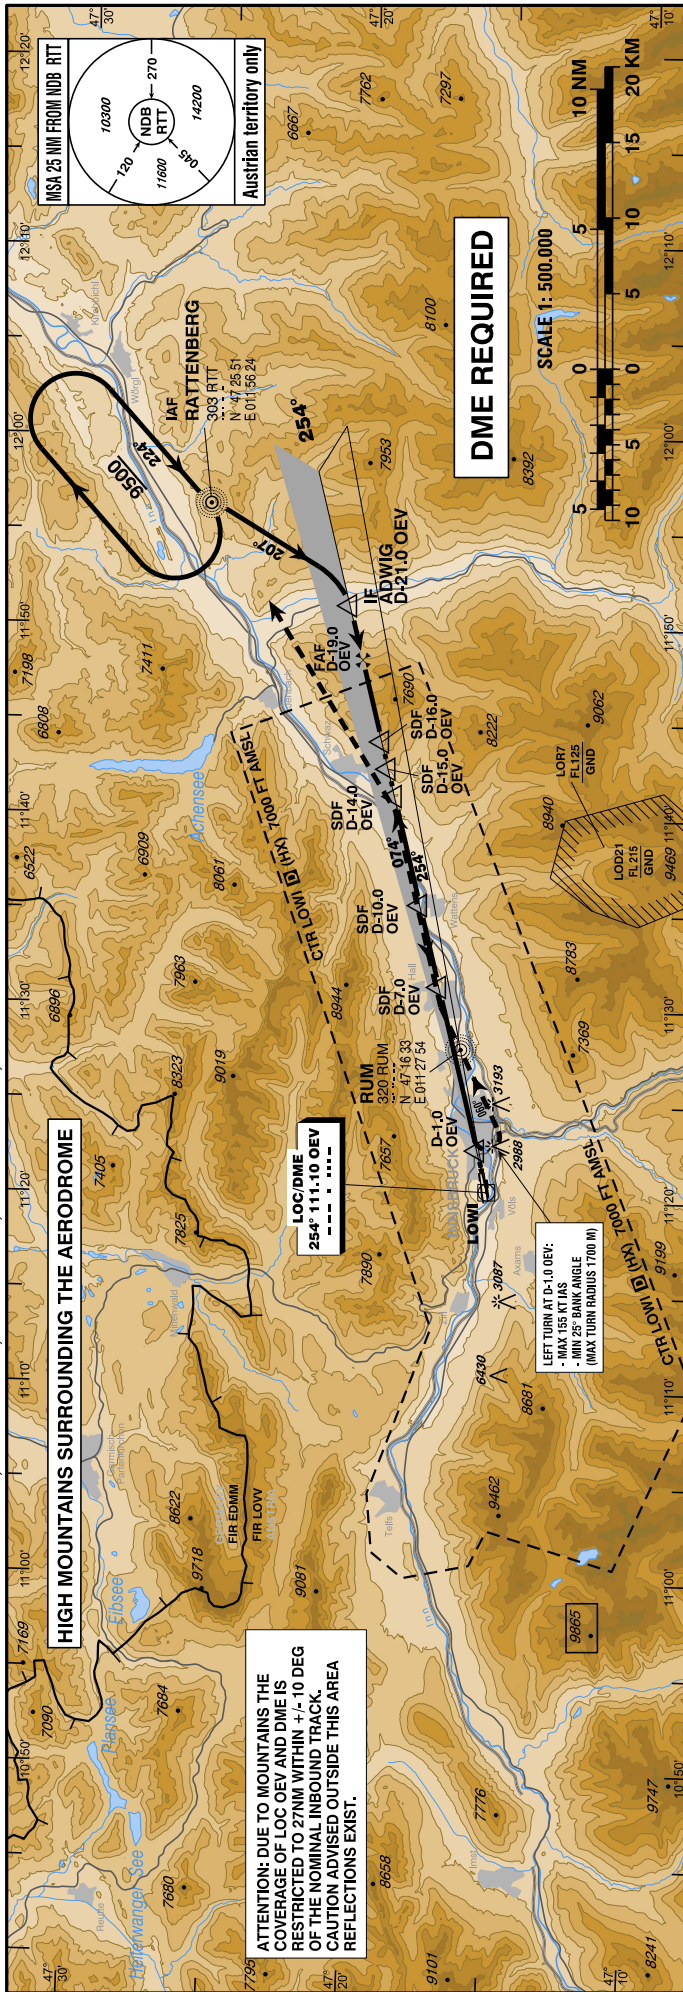

TRANSITION LEVEL
BY ATC

MISSED APPROACH:
CLIMB ALONG LOC OE, AT D-1.0 OE
TURN LEFT AND FOLLOW QDM 060°
IN DIRECTION TO LOCATOR RUM AND
REJOIN LOC OE OUTBOUND.
CONTINUE ALONG LOC OE 074°
WHEN CROSSING D-14.0 OE TURN
LEFT TO NDB RTT
CLIMB TO 9500 FT AMSL AND HOLD.

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS ARE IN FEET
DISTANCES ARE IN NM

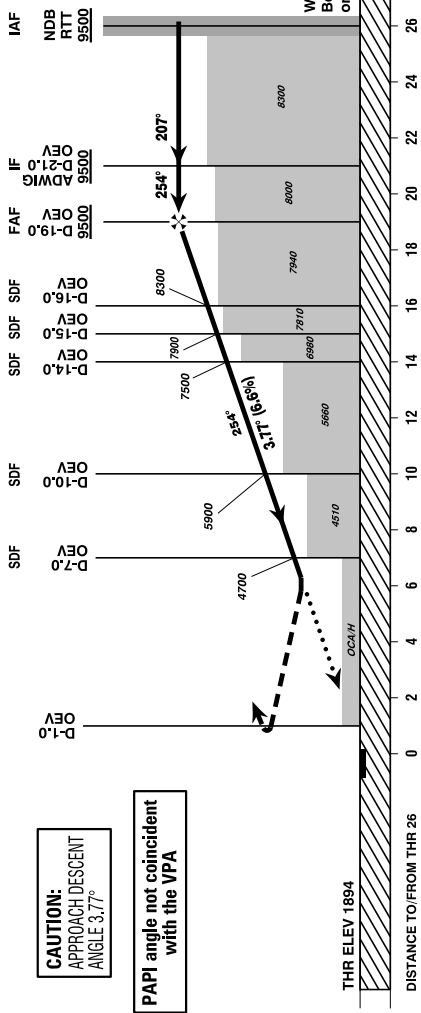

MA CLIMB GRADIENT		A	B	C	D	For detailed information see LOWI AD 2.22										FAF to THR 26 - DISTANCE 18.9 NM (Timing not authorized for defining the MAPt)									
OCA (OCH) IN FT	2.5%	4900 (3006) D-7.5 OEV				DME OEV	18.0	17.0	16.0	15.0	14.0	13.0	12.0	11.0	10.0	9.0	8.0	7.0	6.0	5.0	4.0				
	4.0%	3700 (1806) D-4.5 OEV					DIST THR	17.8	16.8	15.8	14.8	13.8	12.8	11.8	10.8	9.8	8.8	7.8	6.8	5.8	4.8	3.8			
	5.0%	3300 (1406) D-3.5 OEV					ALT (HEIGHT)	9100 (7206)	8700 (6806)	8300 (6406)	7900 (6006)	7500 (5606)	7100 (5206)	6700 (4806)	6300 (4406)	5900 (4006)	5500 (3606)	5100 (3206)	4700 (2806)	4300 (2406)	3900 (2006)	3500 (1606)			
	AREA OF VISUAL MANOEUVRING SEE LOWI AD 2 MAP 14-1																								